
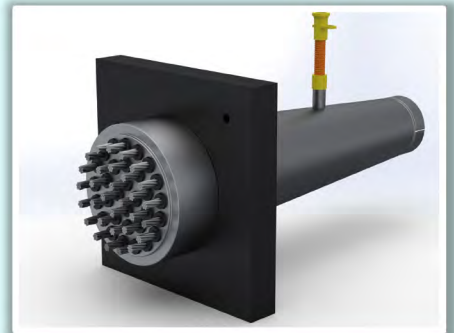


SARE GLOBAL POSTTENSION SYSTEMS

-TECHNICAL DETAILS-

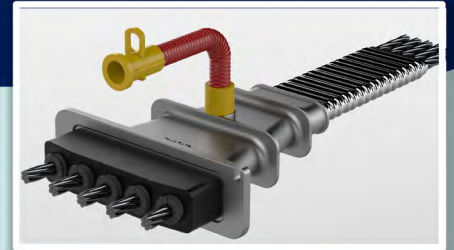

sare[®]
GLOBAL
High quality Turkish brand

DATA SHEET


AH SERIES

PRE-TENSION SYSTEMS




KOVAN / BARREL

Önerilen Çap Aralığı Especially Recommended for Prestressing Steel Diameter	0,5'	0,6'	0,62'
	12,70 mm	15,24 mm	15,75 mm
Uygun Grip Tipi Suitable Wedge Type	Pretensioning Wedge; Nu.D / WPR		
Uygun Grip Uzunluğu Possible Wedge Length	47 mm		
Maksimum Çalışma Yüğü Maximum Service Load	160 - 220 kN		
Çalışma Yüğü Üst Limiti Ultimate Load	230 - 330 kN		
Paket Miktarı Package - Quantity	16 Adet / Pcs		
Paket Boyutları Package - Dimensions	250 x 250 x 75 (mm)		
Sipariş Numarası (Grip Hariç) Order No. (Without Wedges)	AH.07.01.00		

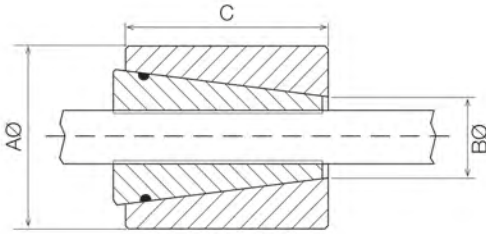

Model No.	Barrel Type	Diameter Range	Tested Breaking Load	A	B	C	Weight
				Ø (mm)	Ø (mm)	(mm)	
AH-1A	Pretensioning	12,2 - 15,8	330 kN	44,5	22,5	54	407 g

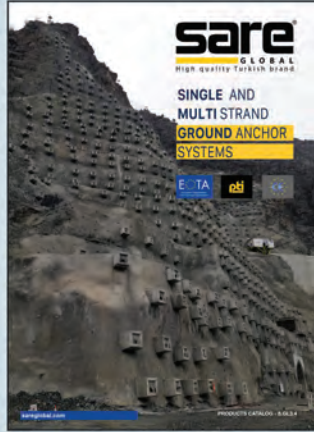

sare[®]
G L O B A L
 High Quality Turkish Brand

Merkez Mah. Çavuşbaşı Cad. No.42 D.5-8 Çekmeköy 34782 İstanbul - Türkiye
 P: +90 216 313 11 13 pbx
 info@sareglobal.com • www.sareglobal.com

